
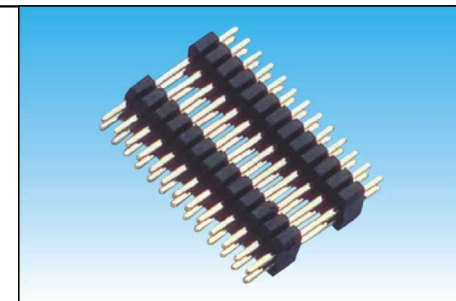
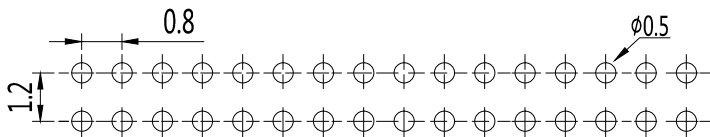
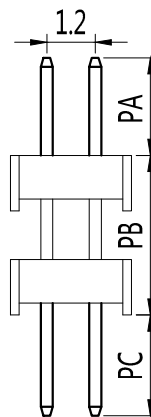
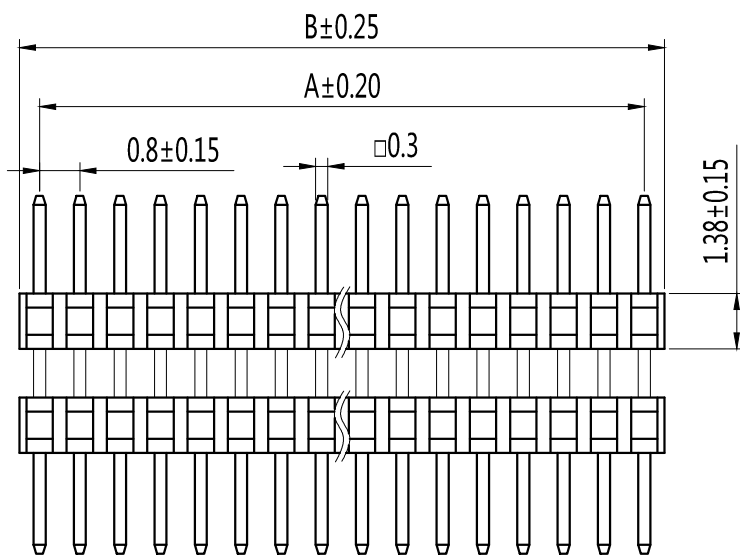


| Pin数 | 尺寸A  | 尺寸B  |
|------|------|------|
| 2    | 0.8  | 1.6  |
| 3    | 1.6  | 2.4  |
| 4    | 2.4  | 3.2  |
| 5    | 3.2  | 4.0  |
| 6    | 4.0  | 4.8  |
| 7    | 4.8  | 5.6  |
| 8    | 5.6  | 6.4  |
| 9    | 6.4  | 7.2  |
| 10   | 7.2  | 8.0  |
| 11   | 8.0  | 8.8  |
| 12   | 8.8  | 9.6  |
| 13   | 9.6  | 10.4 |
| 14   | 10.4 | 11.2 |
| 15   | 11.2 | 12.0 |
| 16   | 12.0 | 12.8 |
| 17   | 12.8 | 13.6 |
| 18   | 13.6 | 14.4 |
| 19   | 14.4 | 15.2 |
| 20   | 15.2 | 16.0 |
| 21   | 16.0 | 16.8 |
| 22   | 16.8 | 17.6 |
| 23   | 17.6 | 18.4 |
| 24   | 18.4 | 19.2 |
| 25   | 19.2 | 20.0 |
| 26   | 20.0 | 20.8 |
| 27   | 20.8 | 21.6 |
| 28   | 21.6 | 22.4 |
| 29   | 22.4 | 23.2 |
| 30   | 23.2 | 24.0 |
| 31   | 24.0 | 24.8 |
| 32   | 24.8 | 25.6 |
| 33   | 25.6 | 26.4 |
| 34   | 26.4 | 27.2 |
| 35   | 27.2 | 28.0 |
| 36   | 28.0 | 28.8 |
| 37   | 28.8 | 29.6 |
| 38   | 29.6 | 30.4 |
| 39   | 30.4 | 31.2 |
| 40   | 31.2 | 32.0 |
| 41   | 32.0 | 32.8 |
| 42   | 32.8 | 33.6 |
| 43   | 33.6 | 34.4 |
| 44   | 34.4 | 35.2 |
| 45   | 35.2 | 36.0 |
| 46   | 36.0 | 36.8 |
| 47   | 36.8 | 37.6 |
| 48   | 37.6 | 38.4 |
| 49   | 38.4 | 39.2 |
| 50   | 39.2 | 40.0 |

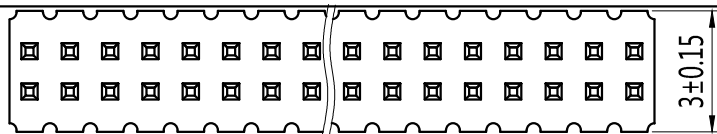

技术规范:  
 额定电流: 0.75AMP  
 适用温度: -40°Cto+105°C  
 接触电阻: 30mΩ Max  
 绝缘电阻: 1000MΩ Min  
 耐电压: AC 500V  
 绝缘材料: Polyester (UL94V-0)  
 Standard: PA-6T  
 端子材质: Brass  
 电镀规范: Au or Sn Over 50u" Ni

| P a-10-1-2-5p-a-a-s-0 |          |         |      |      |           |        |        |         |               |
|-----------------------|----------|---------|------|------|-----------|--------|--------|---------|---------------|
| 排针系列                  | 间距       | 塑高      | 双塑   | 单排   | PIN位      | 电镀     | 材质     | 角度      | 备注            |
|                       | a-0.8mm  | 1.0-10  | 1-单塑 | 1-单排 | 1~40P/50P | A-1u"  | A-PBT  | S=180°  | 0-3.0         |
|                       | b-1.0mm  | 1.5-15  | 2-双塑 | 2-双排 | 2~40/50P  | B-3u"  | B-PA46 | R=90°   | 1-3.0/6.0(双塑) |
|                       | c-1.27mm | 1.6-16  | 3-三塑 | 3-三排 | 3~40/50P  | C-5u"  | C-PA6T | M=SMT   | 2-3.0/3.0(双塑) |
|                       | d-2.0mm  | 1.7-17  |      | 4-四排 | 4~40/50P  | D-10u" | D-PA9T | Z=Z型    | 3-2.8/4.0(双塑) |
|                       | e-2.5mm  | 2.0-20  |      |      |           | E-15u" | E-LCP  | Y=135°  | 4-2.6/3.5(双塑) |
|                       | f-2.54mm | 2.54-25 |      |      |           | F-30u" |        | L=卧式SMT | 其它另做说明        |
|                       | g-3.96mm |         |      |      |           | S-镀锡   |        |         |               |
|                       | h-5.08mm |         |      |      |           | H-半金锡  |        |         |               |

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名稱:

产品料號:

THIRD ANGLE PROJECTION



簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

0.8×1.2mm双排针, DIP, 塑高1.38mm  
 Spec:0.8×1.2mm Pin Header, Dual Row, SMT  
 Positions: 2×5~2×50  
 Plastics Height: 1.38mm