



Pin#	尺寸	尺寸
2x2	1.27	2.94
2x3	2.54	4.21
2x4	3.81	5.48
2x5	5.08	6.75
2x6	6.35	8.02
2x7	7.62	9.29
2x8	8.89	10.56
2x9	10.16	11.83
2x10	11.43	13.10
2x11	12.70	14.37
2x12	13.97	15.64
2x13	15.24	16.91
2x14	16.51	18.18
2x16	17.78	19.45
2x17	19.05	20.72
2x18	20.32	21.99
2x19	21.59	23.26
2x20	22.86	24.53
2x21	24.13	25.80
2x22	25.40	27.07
2x23	26.67	28.34
2x24	27.94	29.61
2x25	29.21	30.88
2x26	30.48	32.15
2x27	31.75	33.42
2x28	33.02	34.69
2x29	34.29	35.96
2x30	35.56	37.23
2x31	36.83	38.50
2x32	38.10	39.77
2x33	39.37	41.04
2x34	40.64	42.31
2x35	41.91	43.58
2x36	43.18	44.85
2x37	44.45	46.12
2x38	45.72	47.39
2x39	46.99	48.66
2x40	48.26	49.93
2x41	49.53	51.20
2x42	50.80	52.47
2x43	52.07	53.74
2x44	53.34	55.01
2x45	54.61	56.28
2x46	55.88	57.55
2x47	57.15	58.82
2x48	58.42	60.09
2x49	59.69	61.36
2x50	60.96	62.63
2x51	62.23	63.90

技术规范:

- 额定电流 : 1AMP
- 适用温度 : -40°C to +105°C
- 接触电阻 : 20mΩ Max
- 绝缘电阻 : 1000MΩ Min
- 耐电压 : AC 500V
- 绝缘材料 : Polyester (UL94V-0)
- Standard: PA-6T
- 端子材质 : Bronze
- 电镀规范 : Au or Sn Over 50u" Ni

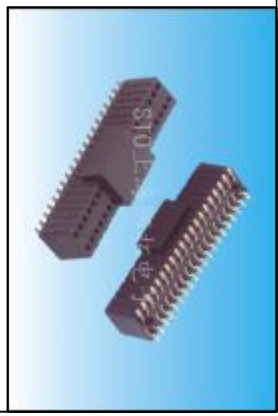

F		a-10-1-2-5P-a-a-s-D-0								
接脚系列	间距	规格	双排	单排	Pin数	电镀	材质	角度	端子	备注
a-1.0mm	1.0mm	1-单排	1-单排	1-单排	S=180°	B=10"	A=PA6T	R=90°	12.5mm间距25	1-3.0/0.6 (双排)
b-1.27mm	1.27mm	2-双排	2-双排	2-双排	B=90°	B=5"	C=PA6T	R=90°	11.0mm间距18	1-3.0/0.6 (双排)
c-1.27mm	1.27mm	3-三排	3-三排	3-三排	C=90°	C=5"	D=PA6T	R=90°	12.5mm间距22	2-3.0/3.0 (双排)
d-2.0mm	2.0mm	4-四排	4-四排	4-四排	A=90/50°	D=10"	D=PA6T	L=左型	100#-非焊接端子	2-2.0/0.6 (双排)
e-2.54mm	2.54mm				F=45°	F=15"	F=12°	R=右型	100#-非焊接端子	2-2.0/0.6 (双排)
f-3.0mm	3.0mm				S=垂直	S=垂直			100#-非焊接口端子	其它另做说明
h-5.08mm	5.08mm				H=左斜	H=左斜			100#-非焊接口端子	其它另做说明

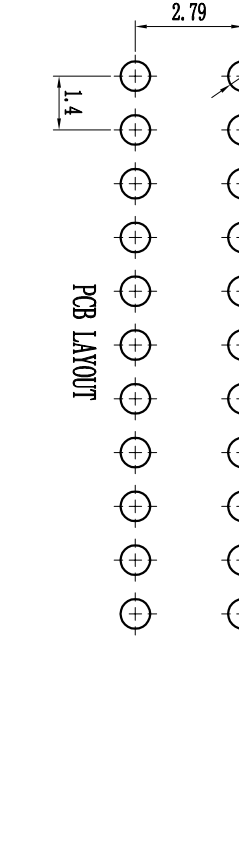

STO 上海狮拓电子科技有限公司

客户确认: 姓名: _____ 日期: _____ 日期: _____

THIRD ANGLE PROJECTION

1.27mm双排母, SMT, 塑高4.6mm
Spec: 1.27mm Female Header, Dual Row, SMT
Positions: 2x5*2x50
Plastics Height: 8.5mm