


RoHS
compliant






文件 编 码

ST0007-010-XXX

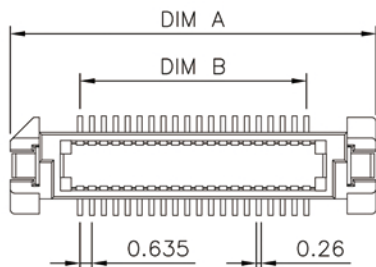


ELECTRICAL:
VLOTAG RATING:50V AC(RMS)/DC
CURRENT RATING:0.5A AC(RMS)/DC
CONTACT RESISTANCE:50MΩ MAX
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:200V
AC R.M.S
OPERTING TEMPERATURE:-30°C~+80°C
MATERIRLS
HOUSING:HIGH TEMPERATURE PLASTIC
UL94V-0
TERMINAL:COPPER ALLOY
MATERIAL:LCP
CONTACT:PHOSPHOR BRONAE,SEMI GOLD TIN

NO. OF * CContacts	Dimension(mm)			
	A±0.20	B±0.10	C±0.10	D±0.10
30	16.325	8.89	13.225	11.375
* 40	19.50	12.065	16.40	14.55
50	22.675	15.24	19.575	17.725
52	23.31	15.875	20.21	18.36
60	25.85	18.415	22.75	20.90
70	29.025	21.59	25.925	24.075
80	32.20	24.765	29.10	27.25

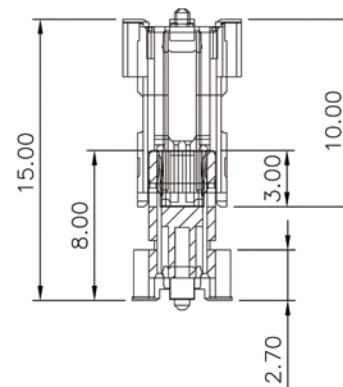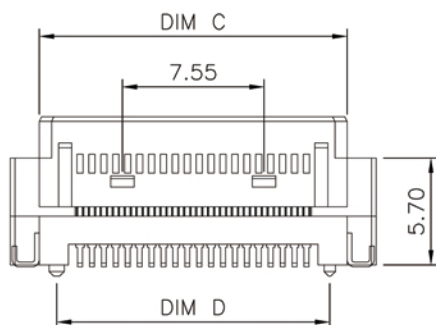

MATING DRAW REF

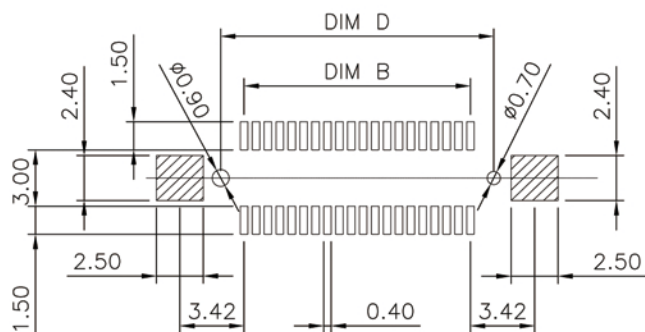

RECOMMENDED PCB LAYOUT

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION

簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

0.635MM BOARD TO BOARD

母座 SMT H10.0