



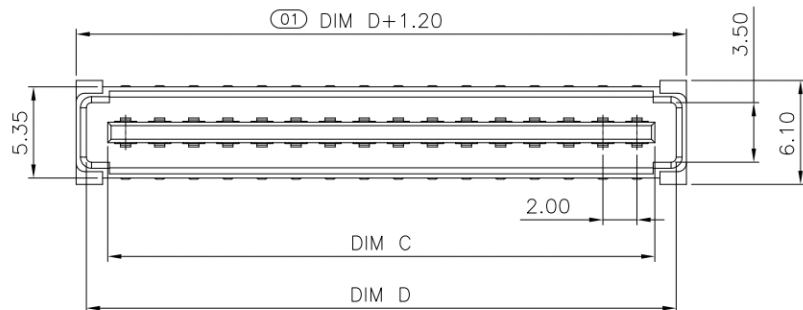
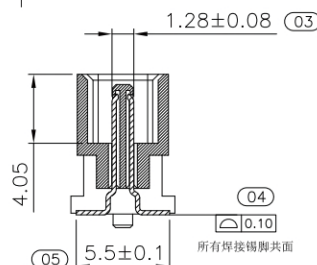


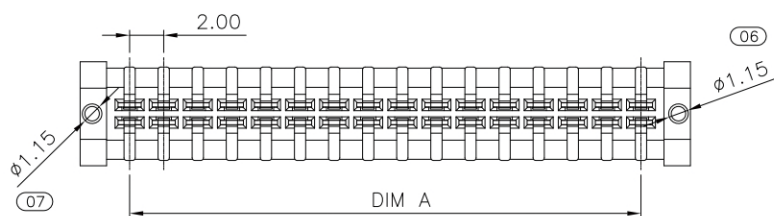


(XX) 标注为重点管控尺寸



装配 合高

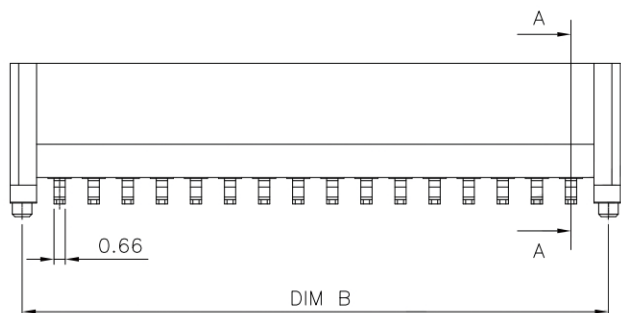

剖面 A-A

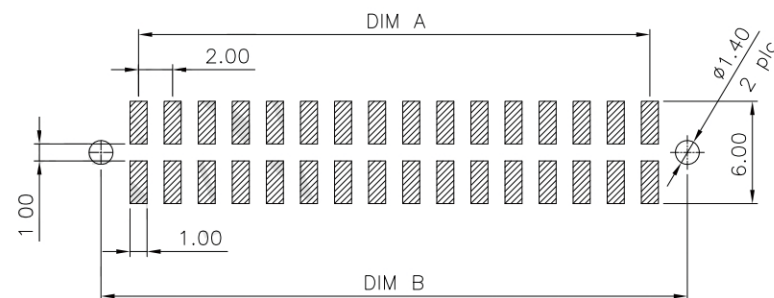

TOLERANCE: ± 0.05 ,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

◆ 技术参数/Technical parameters

- 符合规范/Accord With Norm :EIA-364C
- 额定电流/Current Rating :1.5AMP
- 绝缘阻抗/Insulator Resistance :1000M Ω Min.
- 接触阻抗/Contact Resistance :20m Ω Max.
- 耐电压值/Voltage Resistance :AC 500V
- 工作温度/Operating Temperature : -40°C To +105°C
- 金属材料/Metallic Material :COPPER ALLOY
- 金属处理/Metal Treatment :Ni (30u"~50u") + Au (0.5u"~0.8u")
- 绝缘材料/Insulator Material :LCP, WHITE, UL94V-0.
- 耐焊接热/Resistance To Soldering Heat :260° C $\pm$ 5° C 10S MAX

TOLERANCE:

X. $\pm$ XXX

.X $\pm$ 0.20

.XX $\pm$ 0.10

ANG.



产品名称:

产品料号:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION

签名
日期
审核
日期

客户确认

☐ 承認 日期

☐ 駁回 日期

2.0mm 间距, 板对板 H=8.25

无防呆插插座