


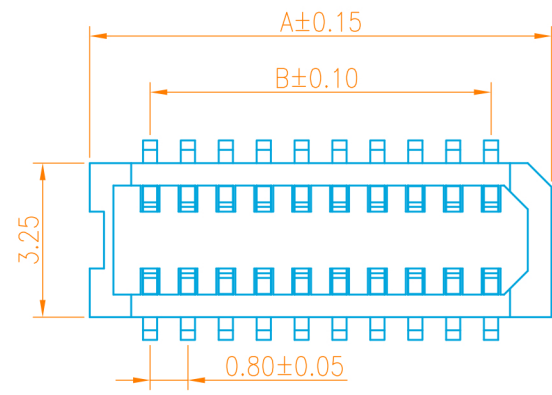




1
2
3

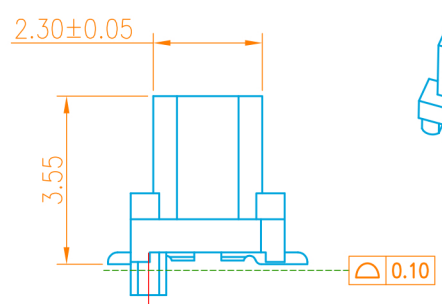

MATING HEIGHT
SCALE:1.25:1

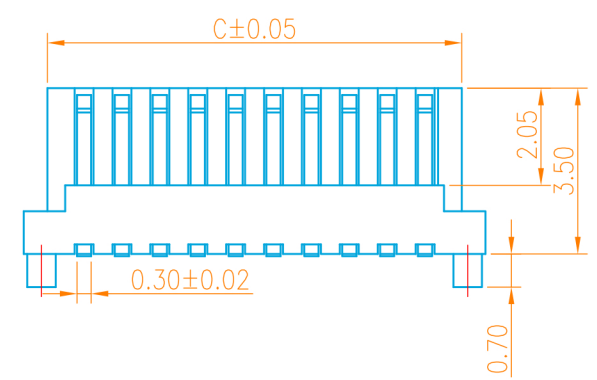

3D VIEW

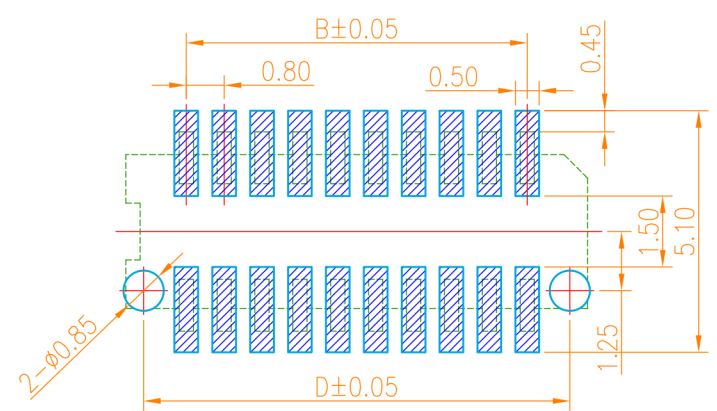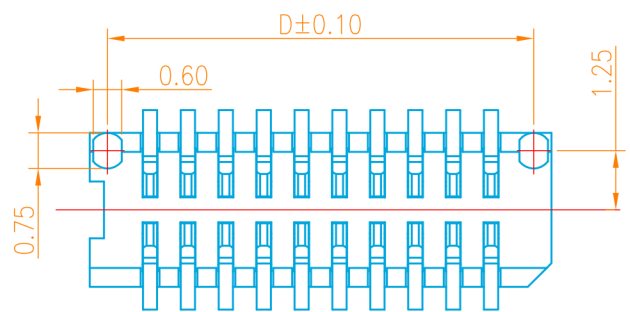

NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:CREAM-COLOURED
2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

Ordering information

BTB 3 2 08- XX - 1 52 W GO W 1 5 4

1. Male
2. Female

Pitch:
1. 05:0.5mm
2. 08:0.8mm

No. of PIN:
(8~100P)
40~40P
15=15P

Combined High:
15:1.5mm
20:2.0mm
25:2.5mm
30:3.0mm
35:3.5mm
40:4.0mm
45:4.5mm
50:5.0mm
60:6.0mm

Welding:
S:180°
R:90°
M:SMT
W:90° SMT

Contact Plating:
G0: gold flash
G1: 30"
G2: 50"
G3: 100"

Plastic Material:
1: PBT
2: PA66
3: PA6T
4: PA9T
5: LCP

Packing:
1: bag
2: Tube
3: Box
4: Reel

NO. of contacts	Dimensions			
	A.	B.	C.	D.
4	3.35	0.80	2.35	2.60
6	4.15	1.60	3.15	3.40
8	4.95	2.40	3.95	4.20
10	5.75	3.20	4.75	5.00
12	6.55	4.00	5.55	5.80
14	7.35	4.80	6.35	6.60
16	8.15	5.60	7.15	7.40
18	8.95	6.40	7.95	8.20
20	9.75	7.20	8.75	9.00
22	10.55	8.00	9.55	9.80
24	11.35	8.80	10.35	10.60
26	12.15	9.60	11.15	11.40
28	12.95	10.40	11.95	12.20
30	13.75	11.20	12.75	13.00
32	14.55	12.00	13.55	13.80
34	15.35	12.80	14.35	14.60
36	16.15	13.60	15.15	15.40
38	16.95	14.40	15.95	16.20
40	17.75	15.20	16.75	17.00
42	18.55	16.00	17.55	17.80
44	19.35	16.80	18.35	18.60
46	20.15	17.60	19.15	19.40
48	20.95	18.40	19.95	20.20
50	21.75	19.20	20.75	21.00
52	22.55	20.00	21.55	21.80

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

STO

產品名稱:
產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION

簽名
日期
審核
日期

客戶確認
☐ 承認 日期
☐ 駁回 日期

0.8mm合高5.2側插公座